


LED BEACONS

SF10-M1KTB-B

Multi-function LED beacon, IP66, Ø100mm 12-24V DC, terminal block/buzzer/blue

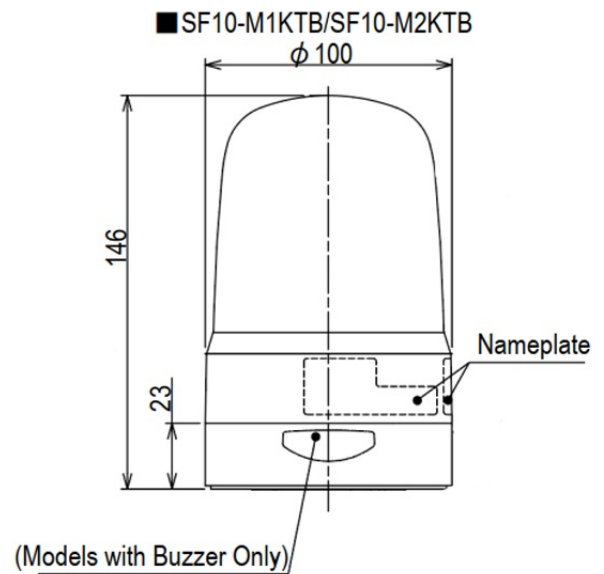

Specifications

Brand	Patlite	Operating temperature	-20°C to +50°C
Buzzer	Yes	Operating voltage	10-30V DC
CE certificate	Yes	Particularities	Rotates 60x, 120x and 180x/minute or flashes 60x, 90x and 120x/minute or pulses 20x/minute
Cable length	500mm	Rated current	12V DC 0,64A / 24V DC 0,34A
Certificates, quality marks, markings	CE, cULus, EAC, KC	Rated voltage	12-24V DC
Colour lens	Blue	Relative humidity	Less than 90% (no condensation) at 20°C
Dimensions	Ø100mm x 146mm	Sound level (max.)	88dB
Impact resistance	4,5G	Type	Pre-configured
Ingress protection	IP66	UL certificate	Yes
LED life	100 000h	Voltage	12V DC / 24V DC
Light patterns	Rotating	Weight	400g
Luminous intensity	400cd		
Material	Polycarbonate		
Mounting and connection type	-30°C to +80°C		