


FLEXIBELE LED-SIGNALISATIE


30022-012

FLEX LED | RGB | 16,5mm x 16,5mm | 1m | M12

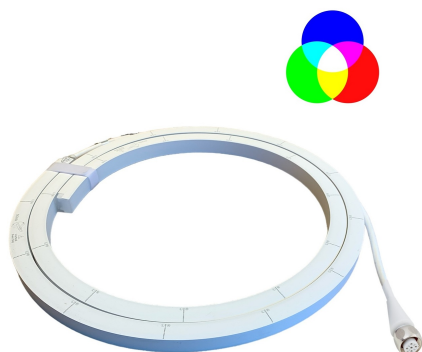

M12 Connector

Pin Assignment

			
M 12 male connector			
RGBW	RGB	Mono RED	Mono GREEN
1 = Green	1 = Green	1 = N/C	1 = Green
2 = Blue	2 = Blue	2 = N/C	2 = N/C
3 = 24VDC	3 = 24VDC	3 = 24VDC	3 = 24VDC
4 = Red	4 = Red	4 = Red	4 = N/C
5 = White	5 = N/C	5 = N/C	5 = N/C

Specificaties

Aansluiting	M12 (A-code), 5-pin	Lichtstroom	R: 53lm/m G: 153lm/m B: 30lm/m RGB: 226lm/m
Aantal LEDs	72 LEDs/m	Materiaal	Siliconen
Afmetingen	16,5mm x 16,5mm	Merk	4K
Buigradius	>120mm	Oriëntatie LEDs	Direct
Certificaten, keurmerken, markeringen	CE, RoHS, CB	Oriëntatie lichtvlak	Lateraal
Dimbaar	Ja, via PWM	Slagvastheid	IK08
Gebruikstemperatuur	-40°C tot +55°C	Spanning	24V DC
IP-aanduiding	IP67, IP69	Stralingshoek	120°
Kleur	Wit	Stroomverbruik	17W/m
Kleur LEDs	RGB	Type	LED-flex verlichting
Kleurweergave index	>80	UV-Bestendig	Ja
Kniplengte	83mm		
Lengte	1m		
Levensduur LEDs	70 000h @ 25°C		