

 suprabeam®

I4_r



1000
LUMENS



Li-ion
12.4 Wh



382 g




120°



IP65

410.1001

KEY FEATURES / UNIQUE SELLING POINTS (USP)



WATER RESISTANT AND DUSTPROOF - IP65

Tested according to IP65 ensures water resistant and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



MAGNETIC

With 3 super strong built in magnets in the bottom and back of the I4r it can be fixed on any magnetic surface to use it as a fixed work light for hands free operation.



180° FOLDABLE LIGHT

With the 180° foldable head the I4r ensures a very flexible og versatile worklight for multiple situations.



TOP LIGHT- 200LM

With the smart 200 Lumens top light the I4r can be used in all kinds of situations. With this extra light option the I4r is perfect for both area light and inspection.



HIDDEN HOOKS


On the back of the I4r it has 2 hidden hooks which enables you to hang your worklight up high to provide you with a great area light.



HEAVY DUTY IK09

The rugged design and IK09 rating of the I4r makes it durable in almost every situation. Take the I4r with you everywhere and it will be your trusty companion.

LIGHT CURVE AND RUNTIMES

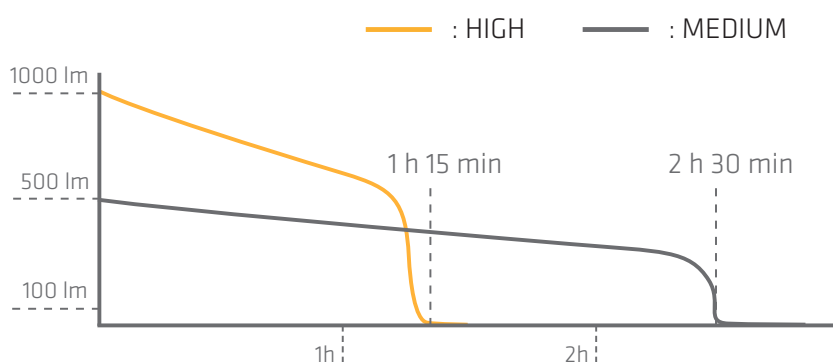

HIGH

1000 LUMENS

1 h | 15 min

MEDIUM

500 LUMENS

2 h | 30 min

LOW

250 LUMENS

4 h | 15 min

TOP LIGHT

200 LUMENS

WHAT'S IN THE BOX

WORKLIGHT



ADAPTER



USB-C CABLE



PACKAGING



PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Carton Box
Single Box Content / Size / Weight:	1 pcs, Height/Width/Depth, 27/10/8.5 cm / 550 g
Master Box Content / Size / Weight:	12 pcs, 36 x 31.5 x 29 cm / 7.2 kg
Part. No.:	410.1001
EAN-CODE:	5704049908024

SPECIFICATIONS

LED / Focus Configuration:	Main light: High quality 10W COB LED, 6,500K, Top Light: High quality 4W SMD LED,6,500K
Case Material / Surface Treatment:	2K Plastic Durable Housing
Case Color:	Black / Light Grey
Switch:	TOP LIGHT, HIGH, MEDIUM, LOW
Dimensions:	H: 260mm, W: 53mm, D: 39.3
Weight incl. Battery:	382g
Ingress Protection/Impact Protection Rating:	Water Resistant and Dustproof IP65 / IK09
Temperature (Operation):	-10°C to +40°C

ELECTRONICS

Built in Controller:	Yes, 4-step Controller by Press
Standard Power Source:	Li-ion 3.7V, 3350 mAh, 12.39 Wh
Charging Time:	4 hours 30 min
Beam Type / Distance:	180° Adjustable Head / Top Light: 75 m, Main Light: 40 m
Luminous Flux:	High: 1000lm, Medium: 500lm, Low: 250lm / Top Light: 200 lm
Lighting Time:	High: 1 h, Medium: 3h, Low: 11h
Accessories Included:	110V -240V AC/DC Charger / 5V 1A, USB-C Cable
Charging Temperature:	-0°C to +45°C

DIMENSIONS



39.3 cm



26 cm

53 cm

Distributor's Stamp:

Distributed worldwide by:

Steiner A/S
Dyssen 3
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212
www.suprabeam.com
info@suprabeam.com