

 suprabeam®

W6<sub>r</sub>



4600  
LUMENS



Li-ion  
76.9 Wh



2140 g




2x110°



IP54

410.1301

# KEY FEATURES / UNIQUE SELLING POINTS (USP)



## WATER- AND DUST RESISTANT - IP54

Tested according to IP54 ensures water resistant and dust resistant protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



## 180° ROTATING LIGHT

The W6r has two lightpanels, which can be rotated 180° individually. This means the W6r will be able to deliver light in two different directions at the same time.



## 90° ADJUSTABLE HANDLE

The 90° flexible handle on the W6r ensures a very flexible and versatile worklight for multiple situations.




## EXTERNAL BATTERY

The externally charged 5200 mAh Li-ion battery can be charged, while using a spare battery in the W6r. Spare battery is sold separately (410.9001)



## HIGH CRI +80


The W6r has High CRI (+80) to bring out the true colors. With the High CRI the W6r provides the most natural colors to make the workday a lot easier.



## POWER BANK FUNCTION

The battery for the W6r can be used as a power bank. The battery inside the W6r has a USB 5V/2A Output on the back for charging a mobile phone.

# LIGHT CURVE AND RUNTIMES

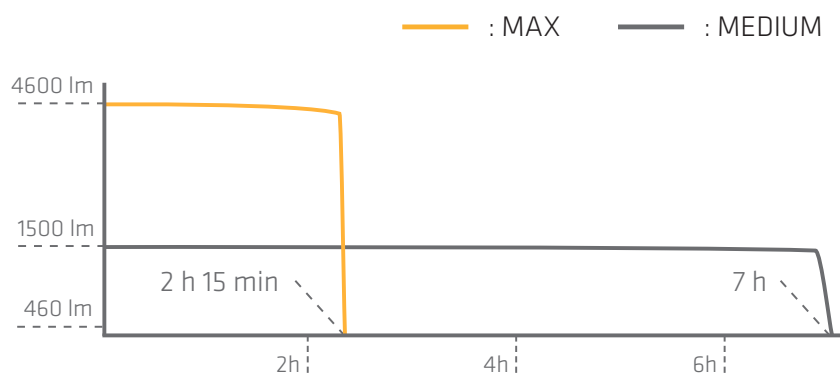

## MAX

4600 LUMENS

2 h | 15 min

## HIGH

3000 LUMENS

3 h | 30 min

## MEDIUM

1500 LUMENS

7 h

## LOW

750 LUMENS

14 h

# WHAT'S IN THE BOX

## WORKLIGHT



## ADAPTER



## BATTERY



# PACKAGING



## PACKAGING

Customs Tariff Number:	9405 4039
Packaging:	Carton Box
Single Box Content / Size / Weight:	1 pcs, Height/Width/Depth, 31.8/18.2/16 cm / 2660 g
Master Box Content / Size / Weight:	4 pcs, 38 x 33.5 x 33.5 cm / 11.2 kg
Part. No.:	410.1301
EAN-CODE:	5704049908086

# SPECIFICATIONS

LED / Focus Configuration:	120pcsx SMD LEDs, 5700K
Case Material / Surface Treatment:	2K Plastic Soft/Hard
Case Color:	Black / Light Grey
Switch:	MAX, HIGH, MEDIUM, LOW
Dimensions:	H: 288mm, W: 176mm, D: 131mm
Weight incl. Battery:	2410g
Ingress Protection/Impact Protection Rating:	Water Resistant and Dustproof IP54 / IK07
Temperature (Operation):	-10°C to +40°C

# ELECTRONICS

Built in Controller:	Yes, 4-step Controller by Press
Standard Power Source:	Li-ion 14.8V, 5200 mAh, 76.96 Wh
Charging Time:	5 hours
Beam Type / Distance:	90° Adjustable Handle, 2x180° Adjustable Floodlight / 80 m
Luminous Flux:	Max: 4600lm, High: 3000lm, Medium: 1500lm, Low: 750lm
Lighting Time:	Max: 2h 15 min, High: 3h 30 min, Medium: 7h, Low: 14h
Accessories Included:	110V -240V AC/DC Charger / 20V 1.1A
Charging Temperature:	-0°C to +45°C

# ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Tripod for single lamp mount	410.9003	2.6 kg	L: 77 cm, W: 16 cm, H: 16 cm	5704049908116
	Spare battery with USB 5V/2A out. (5200mAh / 14.4V incl. internal charging!)	410.9001	554 g	H: 11.6 cm, W: 8.5 cm, D: 7 cm	5704049908093

# DIMENSIONS



13.1 cm



17.6 cm

28.8 cm

Distributor's Stamp:

Distributed worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
**www.suprabeam.com**  
info@suprabeam.com