

Q1

suprabeam®
| DENMARK

PACKAGING



160 LUMENS

SPECIFICATIONS

2xAAA

70 m

56 g

10° - 70°

WHAT'S IN THE BOX

TORCH



BATTERIES



MANUAL



UNIQUE SELLING POINTS (USP)

SWITCH

The endcap metal button is a switch with a task function, allowing you to step through the light modes without activating the lamp constantly. The different light functions are provided by our Intelligent Light Control circuit.


ROTATING HYPERFOCUS™

The rotating Hyperfocus™ lets you go from flood to spot with a light turn of the lamp-head. Control the focus with two fingers and switch quickly from 10 degrees to 70 degrees.

INTELLIGENT LIGHT CONTROL

The advanced electronic micro controller offers switching between high and low light power by a simple switch operation. In addition, it controls the light output for an optimized battery lifetime.

LIGHT CURVE AND RUNTIMES

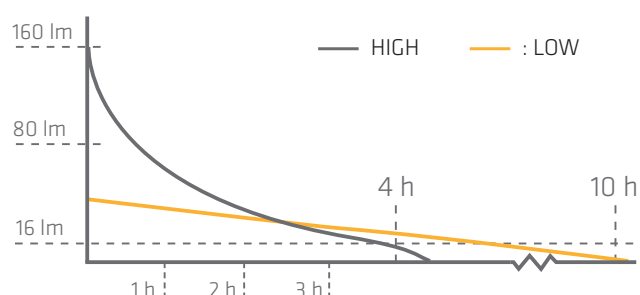

HIGH

160 LUMENS 16

4_h

LOW

40 LUMENS 4

10_h

SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Rotating Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch:	Quality Tested Metal Switch With Touch Function - Switch At Rear
Dimensions:	L: 141.5mm, ø: 15mm
Weight incl. battery:	56g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +50°C

ELECTRONICS

Built in Controller:	Yes, 2-step controller by press or touch
Standard Power Source:	2 x AAA Alkaline
Compatible with rechargeable cells:	Yes, with AAA NiMH 1.2V
Beam / Distance:	Variable from Spot to Floodlight / 70 Meters
Luminous Flux:	High: 160 lm / Low: 40 lm
Lighting Time:	High: 4 h. / Low: 10 h.
Accessories included:	Attachment Clip

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, height/diameter, 15,8 x 6.5 cm / 144 g
Master Box Content / Size / Weight:	72 pcs, 40 x 41 x 36.5 cm / 9.1 kg
Order's Address:	info@suprabeam.com
Part No.:	501.3005
EAN-CODE:	5704049901742

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED




TOUCH

Touch function enables you to toggle through the light levels swiftly, without having to fully activate the switch



WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



ROTATING FOCUS

The rotating Hyperfocus™ lets you go from flood to spot with a light turn of the lamphed



COMPATIBLE WITH NiMH

With NiMH compatibility you will be able to make your alkaline torch or headlamp rechargeable