

Q2_r

suprabeam®
| DENMARK

PACKAGING



450 LUMENS

SPECIFICATIONS

Li-Po
1100 mAh

175 m

67 g

10° - 70°

WHAT'S IN THE BOX

TORCH



POUCH




USB CABLE



BATTERY



MANUAL



UNIQUE SELLING POINTS (USP)

SLIDING HYPERFOCUS™

Focus from wide floodlight to narrow spot light. With the sliding Hyperfocus™ optical system it is easy to get the correct light output with a minimum loss of light. Just slide the head of the torch for the correct light setting and you are good to go.


DIMMING + MEMORY

The new electronic task switch combined with our new dimming control, offer simple and stepless power adjustment from 250 down to 6 lumens. It memorizes the last used light output and upon one single click it activates maximum power again.

USB INTERNAL CHARGING

Compatible with USB. This enables you to charge everywhere, either with our 5V/2A adapter, through your computer or with a car charger.

LIGHT CURVE AND RUNTIMES

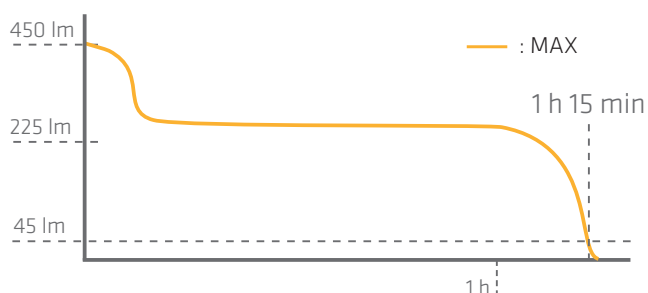

MAX

450 LUMENS 45

1 h 15 min

DIMMING

250 LUMENS 6

1 h 30 min - 70 h

SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch:	Electronic Switch With Solid Silicone Cover - Switch At Rear
Dimensions:	L: 116mm, ø: 26mm
Weight incl. battery:	67g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +50°C

ELECTRONICS

Built in Controller:	Yes, dimmable
Standard Power Source:	1 x Li-Po (1100 mAh)
Beam / Distance:	Variable from Spot to Floodlight / 175 Meters
Luminous Flux:	Max: 450 lm / Dim: 250-6 lm
Lighting Time:	Max: 1 h 15m. / Low dim: 70 h.
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, USB-Cable
Charging time:	To 80%: 1h 45m To 100% : 3h 15m
Charging temperature:	0°C - +45°C

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, height/diameter, 18 x 8.5 cm / 193 g
Master Box Content / Size / Weight:	32 pcs, 35 x 35 x 38 cm / 7.35 kg
Order's Address:	info@suprabeam.com
Part No.:	502.5005
EAN-CODE:	5704049907508

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED




ELECTRONIC DIMMING

Our electronic dimming lets you dim the light to the desired level with ease



WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



RECHARGEABLE

Rechargeable products will prevent you from using and throwing away alkaline batteries



USB CHARGER

All of our rechargeable products are compatible with USB. This enables you to charge everywhere