







UNIQUE SELLING POINTS (USP)

SMART INTERNAL CHARGING

The USB connected charger for the Q5xr defend is designed to be mounted hanging on a wall or installed in a vehicle, making it effortless to hang in your Q5xr defend for charging.


PROGRAMMABLE


The Q5xr defend offers two modes, one goes from Max to Low, the other one goes from Low to Max. You can easily switch between the two programs, so that you can choose the mode that fits the task at hand. Besides the two modes the Q5xr defend is equipped with an instant strobe function.

TACTICAL FRONT AND BACK

Use the strike bezel for self-defense or as an easy way to locate your torch in the dark. When switched on and placed upside down on a table, it will light up around the tip of the head. The tactical tail cap is carefully shaped so that it can be used to break light surfaces. You will also be able to use it for self-defense. Inside there is an integrated clip hanger.

LIGHT CURVE AND RUNTIMES

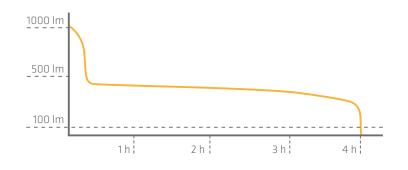



SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Black
Switch:	Electronic Switch With Solid Sili- cone Cover - Switch At Rear
Dimensions:	L: 161mm, ø: 39mm
Weight incl. battery:	182g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +35°C

ELECTRONICS

Built in Controller:	Yes, 4-step controller by press or touch, 2 modes
Standard Power Source:	1 x 18650 Li-ion (3300 mAh)
Beam / Distance:	Variable from Spot to Floodlight / 280 Meters
Luminous Flux:	Max: 1000 lm / Medium: 200 lm / Low: 50 lm / Strobe 10 Hz
Lighting Time:	Max: 4h / Medium: 7h 15min / Low: 37h
Accessories included:	Pro. Quality Pouch with magnetic lock, Strap, AntiRoll ring 100-240VAC Adaptor with USB cable and wall charging base
Charging temperature:	0°C - +45°C

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	PE Portable Box
Single Box Content / Size / Weight:	1 pcs, 25 x 21 x 7 cm / 716 g
Master Box Content / Size / Weight:	6 pcs, 38x 34 x 24 cm / 5 kg
Order's Address:	info@suprabeam.com
Part No.:	505.7005
EAN-CODE:	5704049906785

FEATURES



DC CONVERTER TECHNOLOGY

Highly efficient electronic circuitry. That reduces heat development of the Power LED and decreases the energy consumption.



FOCUS LOCK

Improved Focus Lock-function to prevent unwanted sliding



TACTICAL TAIL SWITCH

The tactical tail switch is shaped for self-defense and breaking light surfaces



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED



SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



STRIKE BEZEL

Locate the torch from a distance and break light surfaces with the strike bezel



TOUCH

Touch function enables you to toggle through the light levels swiftly, without having to fully activate the switch



WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



RECHARGEABLE

Rechargeable products will prevent you from using and throwing away alkaline batteries



INTERNAL FAST CHARGING

The wall charger is designed to be mounted hanging on a wall or installed in a vehicle