


PL302

LED module

PIPS | Ø92mm | AC/DC | Fresnel

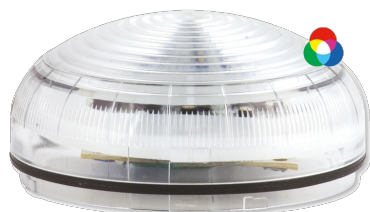

Specifications

Brand	PIPS	Light patterns	Steady, blinking and flashing
CE certificate	Yes	Light source	LED
Certificates, quality marks, markings	CE, UL type 4X, EAC	Luminous intensity	85cd
Colour lens	Clear	Operating temperature	-30°C to +50°C
Dimensions	Ø92mm x 42,5mm	Particularities	Blinks ± 120x1/minute or ± 36x2/minute and flashes ± 60x4/minute or in a random pattern
Ingress protection	IP66	Rated current	12V AC/DC 310mA / 24V AC/DC 180mA / 40V AC/DC 150A / 80V AC/DC 85mA / 120V AC 65mA / 240V AC 55mA
LED life	100 000h	UL certificate	Yes
LEDs colour	Multicolor	Voltage	Depending on the installed base
Light pattern	Steady	Weight	90g

Good to know

This module has a multi-channel technology where you can compose 3 alarm levels completely by yourself. Choose from no less than 8 colours and 5 light effects. Moreover, with this technology you can easily switch the different levels externally. PL301 is equipped with an opal lens for short distance signalling.

