


## LED BEACONS

SF08-M1JN-G

Multi-function LED beacon, IP23, Ø80mm 12-24V DC, cable/green

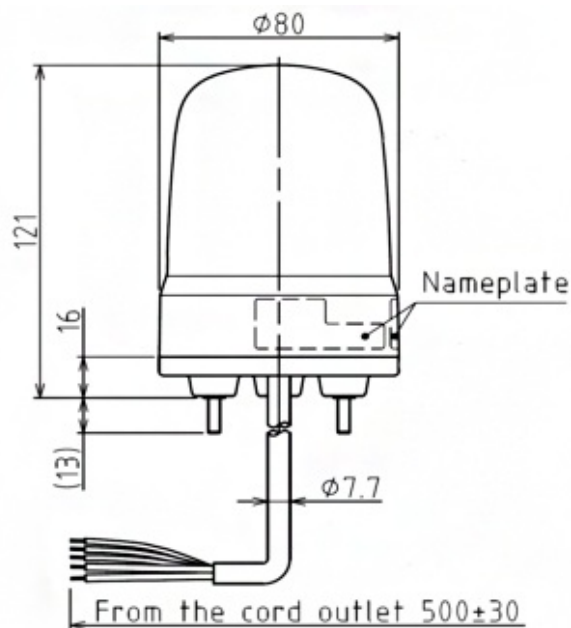

### Specifications

|                                       |  |                              |  |
|---------------------------------------|--|------------------------------|--|
| Brand                                 | Patlite  | Material                     | Polycarbonate  |
| Buzzer                                | No   | Mounting and connection type | 3-screw mounting/cable   |
| CE certificate                        | Yes  | Operating temperature        | -20°C to +50°C   |
| Cable length                          | 500mm  | Operating voltage            | 10-30V DC  |
| Certificates, quality marks, markings | CE, cULus, EAC, KC   | Particularities              | Rotates 60x, 120x and 180x/minute or flashes 60x, 90x and 120x/minute or pulses 20x/minute |
| Colour lens                           | Green  | Rated current                | 12V DC 0,64A / 24V DC 0,34A  |
| Dimensions                            | Ø80mm x 121mm  | Rated voltage                | 12-24V DC  |
| Impact resistance                     | 4,5G   | Relative humidity            | Less than 90% (no condensation) at 20°C  |
| Ingress protection                    | IP23 / IP65 with rubber gasket                                   | Type                         | Pre-configured   |
| LED life                              | 100 000h   | UL certificate               | Yes  |
| Light patterns                        | Rotating, flashing, pulsing, dimming and omni- or unidirectional | Voltage                      | 12V DC / 24V DC  |
| Luminous intensity                    | 600cd  | Weight                       | 270g   |