
SF08-M2JN-G

## Multi-function LED beacon, IP23, Ø80mm 100-240V AC, cable/green



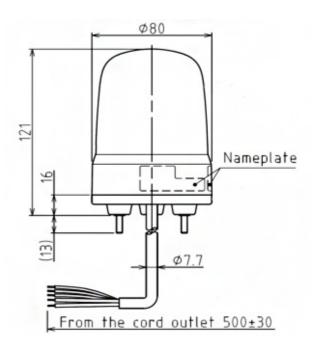

## Specifications

| Brand                                    | Patlite  |
|--|--|
| Buzzer                                   | No   |
| CE certificate                           | Yes  |
| Cable length                             | 500mm  |
| Certificates, quality marks,<br>markings | CE, cULus, EAC, KC   |
| Colour lens                              | Green  |
| Dimensions                               | Ø80mm x 121mm  |
| Impact resistance                        | 4,5G   |
| Ingress protection                       | IP23 / IP65 with rubber gasket   |
| LED life                                 | 100 000h   |
| Light patterns                           | Rotating, flashing, pulsing,<br>dimming and omni- or<br>unidirectional |
| Luminous intensity                       | 600cd  |

| Material                     | Polycarbonate   |
|------------------------------|---|
| Mounting and connection type | 3-screw mounting/cable  |
| Operating temperature        | -20°C to +50°C  |
| Operating voltage            | 90-250V AC  |
| Particularities              | Rotates 60x, 120x and<br>180x/minute or flashes 60x, 90x<br>and 120x/minute or pulses<br>20x/minute |
| Rated current                | 100V AC 0,19A / 240V AC 0,08A   |
| Rated voltage                | 100-240V AC (50/60Hz)   |
| Relative humidity            | Less than 90% (no condensation) at 20°C   |
| Туре                         | Pre-configured  |
| UL certificate               | Yes   |
| Voltage                      | 115V AC / 230V AC   |
| Weight                       | 300g  |