


LED BEACONS

SF08-M2KTB-R

Multi-function LED beacon, IP66, Ø80mm 100-240V AC, terminal block/buzzer/red

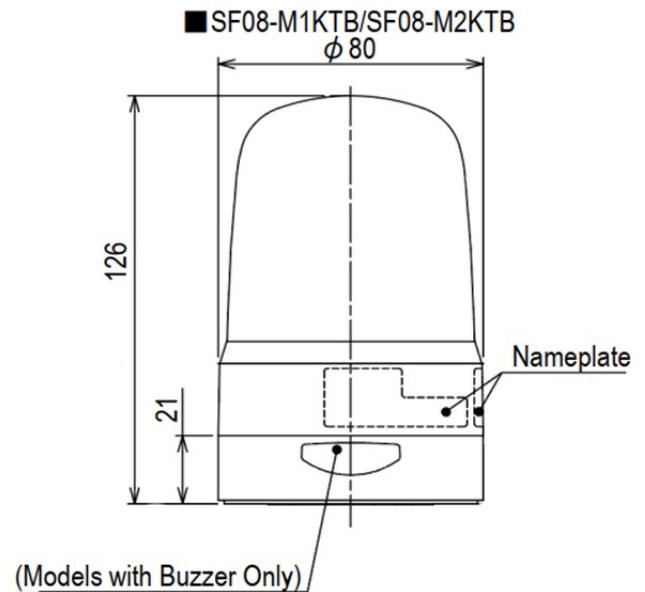

Specifications

Brand	Patlite	Operating temperature	-20°C to +50°C
Buzzer	Yes	Operating voltage	90-250V AC
CE certificate	Yes	Particularities	Rotates 60x, 120x and 180x/minute or flashes 60x, 90x and 120x/minute or pulses 20x/minute
Cable length	500mm	Rated current	100V AC 0,20A / 240V AC 0,08A
Certificates, quality marks, markings	CE, cULus, EAC, KC	Rated voltage	100-240V AC (50/60Hz)
Colour lens	Red	Relative humidity	Less than 90% (no condensation) at 20°C
Dimensions	Ø80mm x 126mm	Sound level (max.)	86dB
Impact resistance	4,5G	Type	Pre-configured
Ingress protection	IP66	UL certificate	Yes
LED life	100 000h	Voltage	115V AC / 230V AC
Light patterns	Rotating, flashing, pulsing, dimming and omni- or unidirectional	Weight	280g
Luminous intensity	650cd		
Material	Polycarbonate		
Mounting and connection type	-30°C to +80°C		