


LED BEACONS

SL10-M2KTN-R

LED beacon, IP66, Ø100mm, 100-240VAC, terminal, red

EAN: 4938766023710

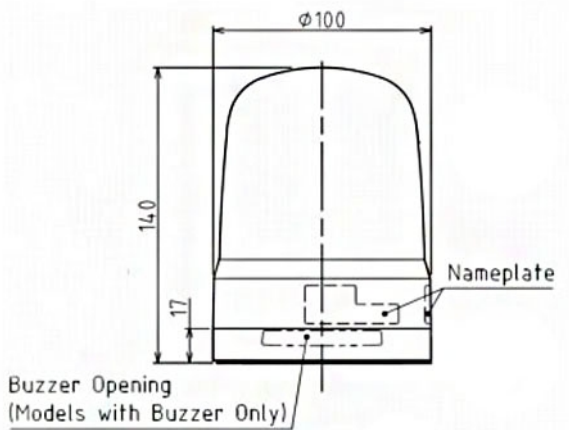

Specifications

Brand	Patlite	Material	Polycarbonate
Buzzer	No	Mounting and connection type	-30°C to +80°C
Cable length	500mm	Operating temperature	-20°C to +50°C
Certificates, quality marks, markings	CE, cULus, EAC, KC	Operating voltage	90-250V AC
Colour lens	Red	Particularities	Blinks 180x/minute or flashes 120x/minute
Dimensions	Ø100mm x 140mm	Rated current	100V AC 0,08A / 240V AC 0,04A
Impact resistance	4,5G	Relative humidity	Less than 90% (no condensation) at 20°C
Ingress protection	IP66	Type	Pre-configured
LED life	100 000h	Voltage	100V AC / 240V AC
Light patterns	Steady, blinking and triple flash	Weight	360g