


LED BEACONS

SL15-M2KTN-G

LED steady/flash beacon, IP66, Ø150mm 100-240V AC, terminal block/green

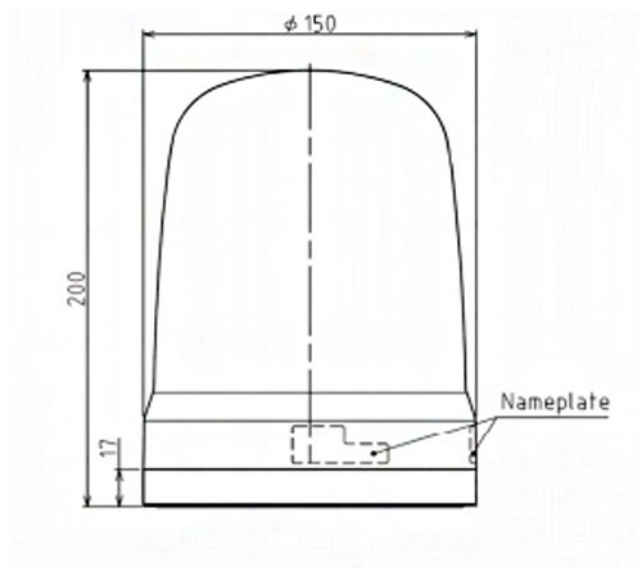

Specifications

Brand	Patlite
Buzzer	No
CE certificate	Yes
Cable length	500mm
Certificates, quality marks, markings	CE, cULus, EAC, KC
Colour lens	Green
Dimensions	Ø150mm x 201mm
Impact resistance	4,5G
Ingress protection	IP66
LED life	100 000h
Light patterns	Steady, blinking and triple flash
Luminous intensity	180cd

Material	Polycarbonate
Mounting and connection type	3-point hole mounting/terminal block
Operating temperature	-20°C to +50°C
Operating voltage	90-250V AC
Particularities	Blinks 180x/minute or flashes 120x/minute
Rated current	100V AC 0,14A / 240V AC 0,06A
Rated voltage	100-240V AC (50/60Hz)
Relative humidity	Less than 90% (no condensation) at 20°C
Type	Pre-configured
UL certificate	Yes
Voltage	115V AC / 230V AC
Weight	890g