


SIGNAL TOWERS

LR4-302WJNU-
RYG

LED signal tower LR4, direct mount, Ø40mm, cable,
24V DC, silver, red/yellow/green

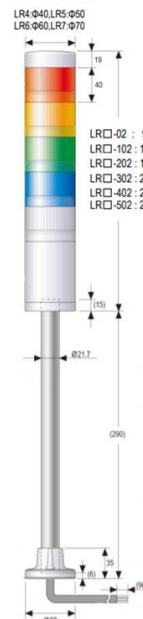

Specifications

Brand	Patlite	Mounting direction	Upright
Buzzer	No	Number of tiers	3
Cable length	1,3m	Operating temperature	-20°C to +50°C
Colour modules	Red, amber and green	Pole mounting	No
Connection	Direct mount/cable	Rated voltage	24V DC
Dimensions	Ø40mm x 253,5mm	Relative humidity	Less than 90% (no condensation) at 20°C
Housing colour	Silver	Type	Pre-assembled
Ingress protection	IP65	Weight	275g
LED life	100 000h	Window type	Colour
Light patterns	Steady		
Light source	LED		
Model	LR4		