


SIGNAL TOWERS

LR6-202WJBW-
RG

LED signal tower LR6 with buzzer, direct mount,
Ø60mm, cable, 24V DC, off-white, red/green

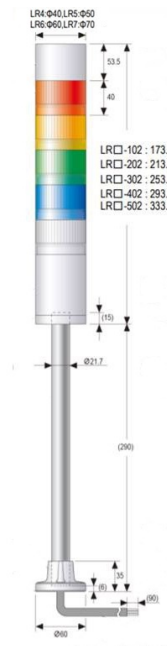

Specifications

Brand	Patlite	Mounting direction	Upright
Buzzer	Yes	Number of tiers	2
Cable length	1m	Number of tones	4
Colour modules	Red and green	Operating temperature	-20°C to +50°C
Connection	Direct mount/cable	Particularities	Flashes ±60x/min
Dimensions	Ø60mm x 213,5mm	Pole mounting	No
Housing colour	Off-white	Rated voltage	24V DC
Ingress protection	IP65	Relative humidity	Less than 90% (no condensation) at 20°C
LED life	100 000h	Sound level (max.)	85dB @1m
Light patterns	Flashing	Type	Pre-assembled
Light source	LED	Weight	400g
Model	LR6	Window type	Colour