


FLEXIBLE LED SIGNALING

30022-003

FLEX LED | RGBW | 5000K | 16,5mm x 16,5mm | 1-sided visible | 2m

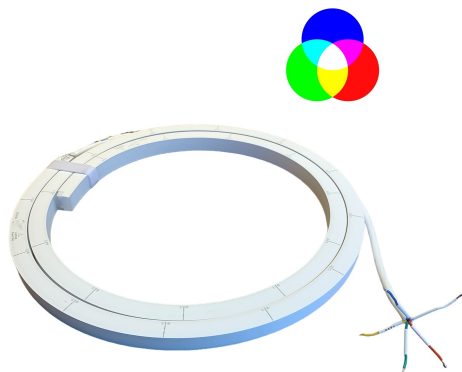

Specifications

Beam angle	120°	LEDs colour	RGBW (5000K)
Bending diameter	>120mm	LEDs orientation	Directly
Brand	4K	Length	2m
Certificates, quality marks, markings	CE, RoHS, CB	Light surface orientation	Lateraal 1-zijdig zichtbaar
Colour	White	Luminous flux	R: 35lm/m G: 135lm/m B: 23lm/m RGBW: 376lm 5000K: 191lm/m
Colour rendering	>80	Material	Silicone
Cutting length	83mm	Number of LEDs	72 LEDs/m
Dimensions	16,5mm x 16,5mm	Operating temperature	-40°C to +55°C
Dimmable	Yes, via PWM	Power consumption	17W/m
Impact resistance	IK08	Type	LED flex lights
Ingress protection	IP67, IP69	UV Resistant	Yes
LED life	70 000h @ 25°C	Voltage	24V DC