


NETWORK ENABLED SIGNALING

LR6-3ILWMNW-
RYG

LED signal tower LR6 | IO-link | direct mount | M12
| Ø60mm | 24V DC | off-white | red/yellow/green

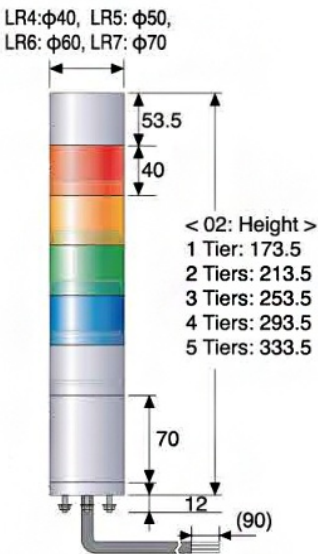

Specifications

Brand	Patlite	Mounting direction	Upright
Buzzer	No	Number of tiers	3
Colour modules	Red, amber and green	Operating temperature	-20°C to +50°C
Connection	M12 (A-code), 4-pin	Particularities	Programmable via IO-Link
Dimensions	Ø60mm	Pole mounting	No
Housing colour	Off-white	Rated voltage	18 - 30V DC
Ingress protection	IP65	Relative humidity	Less than 90% (no condensation) at 20°C
Light patterns	Flashing	Type	IO-Link
Light source	LED	Weight	380g
Model	LR6	Window type	Colour