



PACKAGING



500 LUMENS

SPECIFICATIONS

Li-Ion
2200 mAh

245 m

139 g

10° - 70°

WHAT'S IN THE BOX

TORCH



POUCH



STRAP



ADAPTER



CHARGER



USB-CABLE



BATTERIES



MANUAL



UNIQUE SELLING POINTS (USP)

SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.


USB FAST CHARGING BASE

Connected by standard Micro USB and with our 5V/2A, 100 - 240VAC power adapter it charges the Li-Ion cell at maximum rate. With or without USB power it shows the battery status on a 5-LED light stripe at any time.

SPARE BATTERY - 18650

With two 2200 mAh batteries included as a standard, you can charge one battery externally while using the other in the torch. This gives you the freedom to use the torch without interruption, and you won't have to worry about discontinuing the use of the torch to charge the battery.

LIGHT CURVE AND RUNTIMES

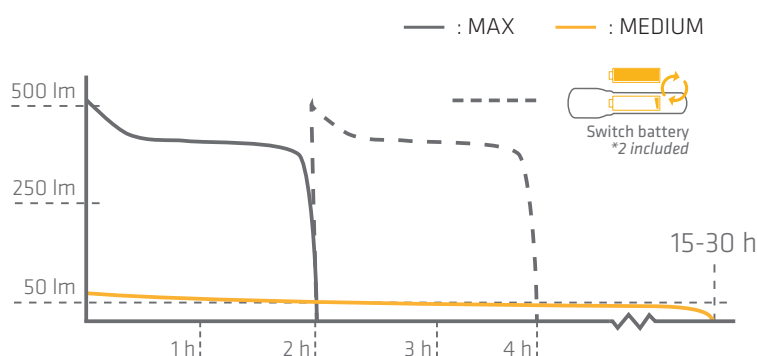

MAX

500 LUMENS 50

2_h

x2

HIGH

250 LUMENS 25

3_h

x2

MEDIUM

50 LUMENS 5

15_h

x2

LOW

15 LUMENS 1.5

89_h

x2

SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch:	Quality Tested Metal Switch With Touch Function - Switch At Rear
Dimensions:	L: 127.7mm, ø: 26.5mm
Weight incl. battery:	139g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +35°C

ELECTRONICS

Built in Controller:	Yes, 5-step controller by press or touch
Standard Power Source:	Li-ion 18650 (2200 mAh) 2 pcs. included
Beam / Distance:	Variable from Spot to Floodlight / 245 Meters
Luminous Flux:	Max: 500 lm / High: 250 lm / Medium: 50 / Low: 15 Lumen / Stroboskop 10 Hz
Lighting Time:	Max: 2h / High: 3h / Medium: 15h / Low: 89h
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, Strap, 100-240VAC Adaptor with USB cable and external ICR 18650 Charger
Charging temperature:	0°C - +45°C

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, height/diameter, 18 x 9,7 cm / 390 g
Master Box Content / Size / Weight:	32 pcs, 41 x 41 x 39.5 cm / 14.5 kg
Order's Address:	info@suprabeam.com
Part No.:	503.5105
EAN-CODE:	5704049902404

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED




TOUCH

Touch function enables you to toggle through the light levels swiftly, without having to fully activate the switch



WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant




SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



RECHARGEABLE

Rechargeable products will prevent you from using and throwing away alkaline batteries



EXTERNAL FAST CHARGING + SPARE BATTERY

Charge one battery externally while using the other in the torch



USB CHARGER

All of our rechargeable products are compatible with USB. This enables you to charge everywhere