

Q7 *xrs*

suprabeam®
| DENMARK

PACKAGING



2000 LUMENS

SPECIFICATIONS

Li-Ion
5000 mAh

345 m

307 g

15° - 75°

WHAT'S IN THE BOX

TORCH



POUCH



STRAP



ADAPTER



CHARGER




USB-CABLE



BATTERIES



MANUAL



UNIQUE SELLING POINTS (USP)

SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.


USB FAST CHARGING BASE

Connected by standard Micro USB and with our 5V/2A, 100 - 240VAC power adapter it charges the Li-Ion cell at maximum rate. With or without USB power it shows the battery status on a 5-LED light stripe at any time.

DIMMING + MEMORY

The new electronic task switch combined with our new dimming control, offer simple and stepless power adjustment from 1000 down to 6 lumens. It memorizes the last used light output and upon one single click it activates maximum power again.

LIGHT CURVE AND RUNTIMES

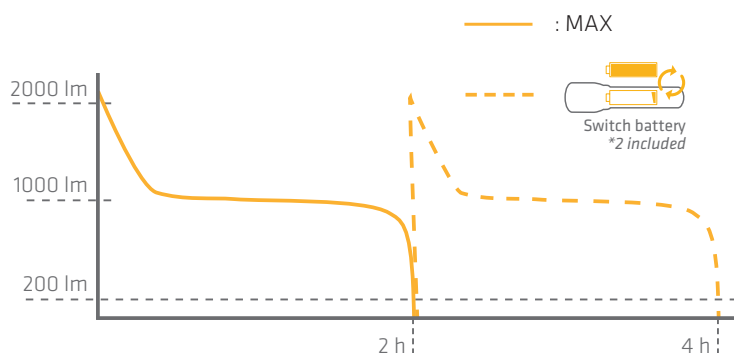

MAX	2000 LUMENS 200	2 h	x2
DIMMING	1000 LUMENS 6	2 ¹⁵ -500 h	x2

SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch:	Electronic Switch With Solid Silicone Cover - Switch At Rear
Dimensions:	L: 158mm, ø: 46mm
Weight incl. battery:	307g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +35°C

ELECTRONICS

Built in Controller:	Yes, dimmable
Standard Power Source:	Li-ion 26650 (5000 mAh) 2 pcs. included
Beam / Distance:	Variable from Spot to Floodlight / 345 Meters
Luminous Flux:	Max: 2000 lm Dimmable: 1000 lm -6 lm
Lighting Time:	Max: 2h / High dim: 2h 15min / Low dim: 500h
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, Strap, 100-240VAC Adaptor with USB cable and external ICR 26650 Charger
Charging temperature:	0°C - +45°C

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	PE Portable Box with Space for Second Battery
Single Box Content / Size / Weight:	1 pcs, 28 x 23 x 8 cm / 1.3 kg
Master Box Content / Size / Weight:	6 pcs, 41 x 41 x 27.5 cm / 8 kg
Order's Address:	info@suprabeam.com
Part No.:	507.6205
EAN-CODE:	5704049907522

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED




ELECTRONIC DIMMING

Our electronic dimming lets you dim the light to the desired level with ease




WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



FOCUS LOCK

Improved Focus Lock-function to prevent unwanted sliding




SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



RECHARGEABLE

Rechargeable products will prevent you from using and throwing away alkaline batteries



EXTERNAL FAST CHARGING + SPARE BATTERY

Charge one battery externally while using the other in the torch



USB CHARGER

All of our rechargeable products are compatible with USB. This enables you to charge everywhere