

# A105NSONTEL Telephone Initiated Alarm Sounder

The A105NSONTEL is a compact, high output, 105dB(A) telephone initiated alarm sounder.

The line powered A105NSONTEL has a choice of three alarm tone frequencies.


## Features

- Continuously rated.
- Stainless steel fixings.
- Unit can be mounted using external lugs or internal BESA compatible fixing positions.
- Tropicalisation available on request.

## Approvals

- GOST-R approved. Cert: POCC GB-JB05-H00144



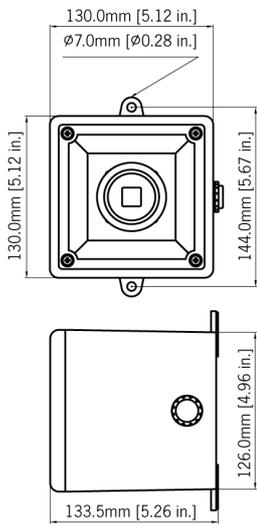

## Specification

Nominal output: 105dB(A) @ 1m +/- 3dB [96dB(A) @ 10ft/3m]

No. of tones: 3

Volume control: Max. 105dB(A); Min. 96dB(A)

Effective range: 60m/197ft @ 1KHz

Supply: Direct power from telephone line (REN 1)

Ingress protection: IP66

Enclosure material: High impact UL94 V0 & 5VA FR ABS

Colour: Red (RAL3000), grey (RAL7038) & white.

Cable entries: 3 x M20 clearance gland knockouts in side & back

Terminals: 0.5 to 2.5mm<sup>2</sup> cables.

Operating temp: -25 to +55°C [-13° to +131°F]

Storage tempe: -40 to +70°C [-40° to +158°F]

Relative humidity: 90% at 20°C [68°F]

Weight: 0.75kg/1.65lbs

## Part Codes

Version:

A105NSONTEL[x]

[x] = Enclosure G: Grey R: Red  
colour: