


Siamese Cable Cat. 7, S/FTP, 2x4P, 1000 MHz, LSZH, grey, Dca, 500 m

1 m

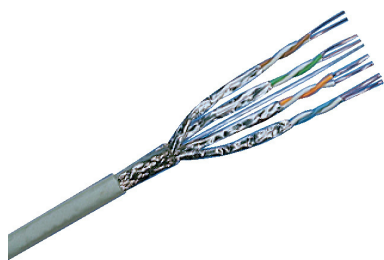

DESCRIPTION

Cat. 7, S/FTP cable. Foil shielding of pairs and overall tin-plated copper braid shield. 100 Ohm impedance. Data transmission frequency of up to 1000 MHz.

020.0983 / similar product

FEATURE

- 100 Ohm installation cable
- Suitable for voice, video and data transmission
- For frequencies up to 1500MHz

TECHNICAL DATA

DESCRIPTION	VALUE/VALUE RANGE
Standard / norm	ISO/IEC 11801 EN 50173-1 IEC 61156-5 EN 50288-4-1 IEC 61034 IEC 60754-2 CPR fire class: EN50575 IEC 60332-1-2
Protection class IP	IP 20
PoE	Yes
PoE Level	4
Cable type	Siamese cable
Cable category	Cat. 7
Shielding	S/FTP
Jacket material	LSZH
CPR classification	Eca
Cable jacket characteristics	zero-halogen
Armour	No protection
Cable overall diameter	Ø 7.0 / 14.0 - 7.6 / 15.5 mm
Conductor	AWG 23

Siamese Cable Cat. 7, S/FTP, 2x4P, 1000 MHz, LSZH, grey, Dca, 500 m

1 m

DESCRIPTION	VALUE/VALUE RANGE
Cable design	normal
Number of wires	16
Stranding	2 x 4 pairs
Wire type	Wire
Max. test frequency	1000 MHz

MECHANICAL DATA

DESCRIPTION	VALUE/VALUE RANGE
Cable length	500.0 m / 1640 ft
Color Code RAL	7035 Light gray
Color	light gray

Pair-shielded 100 Ohm installation cable with overall braided screen, suitable for transmission frequencies of up to 1000 MHz, 2 cables 4 x 2 (AWG 23). Compliant with standards ISO/IEC 11801 ed. 2.2, EN 50173-1: May 2011 (DIN EN 50173-1), IEC 61156-5 2nd Ed., EN 50288-4-1, 10GBASE-T in acc. with IEEE 802.3™ Section Four, tested and certified by independent laboratory. Low-smoke in acc. with IEC 61034, flame-retardant in acc. with IEC 60332-1 and halogen-free in acc. with IEC 60754-2. Outer jacket color gray, RAL 7035.