

# Mounting Plate 45x45 mm

10.10.2017 / V1.0 / Ri



- 2x1 Port with Smart Holes and 1 Port as well
- Can be installed into plastic or metal duct with horizontal or vertical distribution
- Angle and Flat versions
- Labelling window is available
- Three colour white RAL9010 / signal white RAL9003 and black RAL9005
- Material: PC+ ABS
- Interface direct attached

## Technical Datas

Mechanical Data	Requirements	Standard
		IEC 60603-7
Press out Force	≥ 100 [N]	IEC 61753 – 11 - 1
Press holding Force	60N	IEC 61753 – 11 - 1

## Climatic Data

Temperature	Temperature of operational area	Standard
Cold	- 10 °	IEC 60068 – 2 - 1
Dry heat	+ 60 °C	IEC 60068 -2 - 2


## Climatic Data

Temperature	Temperature at storage in dry heat	Standard
Dry heat	+ 60 °C	IEC 60068 -2 - 2
Relative Humidity	90% to 96% non- condensing	IEC 60068- 2- 30

## Matching Modules

RJ45 Module		
Cat.6AEL	<b>R813608</b>	Module Cat. 6A EL, 1xRJ45/s, Special
	<b>R813510</b>	Module Cat. 6A EL, 1xRJ45/u, Special
Cat.6AISO	<b>R803927</b>	Module Cat. 6A, 1xRJ45/s, Special
	<b>R803926</b>	Module Cat. 6A, 1xRJ45/u, Special

Dose mit ISO Modul  
Outlet with ISO Module

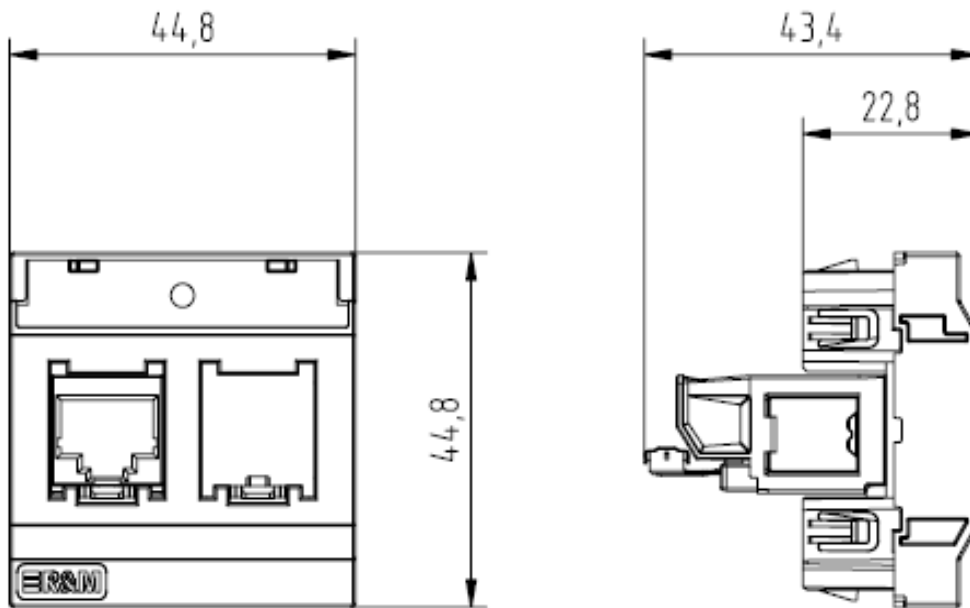

Dose mit EL Modul  
Outlet with EL Module

