


**Installation Cable Cat. 6A, S/FTP, 4P, 650 MHz, LSZH, grey, Cca, 500 m**

500 m

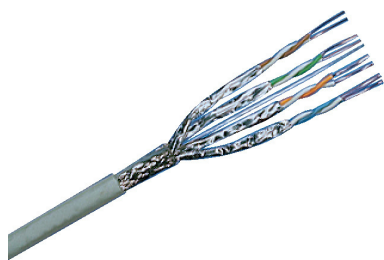

**DESCRIPTION**

Cat. 6A, S/FTP cable. Foil shielding of pairs and overall tin-plated copper braid shield. 100 Ohm impedance. Data transmission frequencies of up to 650 MHz.

020.0983 / similar product

**TECHNICAL DATA**

DESCRIPTION	VALUE/VALUE RANGE
Standard / norm	ISO/IEC 11801 IEC 61156-5 2 <sup>nd</sup> ed. EN 50173-1 EN 50288-x-1 IEC 60754-2 IEC 61034 CPR fire class: EN50575 IEC 60332-1-2
Protection class IP	IP 20
PoE	Yes
PoE Level	4
Cable type	Single cable
Cable category	Cat. 6A
Shielding	S/FTP
Jacket material	LSZH
CPR classification	Cca
Cable jacket characteristics	zero-halogen
Armour	No protection
Cable overall diameter	Ø 7.0 - 7.6 mm
Conductor	AWG 23
Cable design	normal
Number of wires	8
Stranding	4 pairs
Wire type	Wire

**Installation Cable Cat. 6A, S/FTP, 4P, 650 MHz, LSZH, grey, Cca, 500 m**

500 m

DESCRIPTION	VALUE/VALUE RANGE
Max. test frequency	650 MHz
Application	indoor-use

**MECHANICAL DATA**

DESCRIPTION	VALUE/VALUE RANGE
Cable length	500.0 m / 1640 ft
Color Code RAL	7035 Light gray