

CONNECTORS

according to IEC 60309, EN 60309, VDE 0623


turn2fix



CONNECTOR

watertight IP67

- screw terminals
- quick release locking system (turn2fix)
- nickel-plated contacts

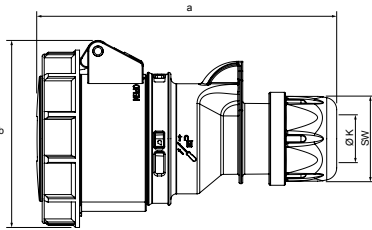

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	133	139	147	163	163	171
b	78	84	92	96	96	102
K	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
SW	42	42	42	50	50	50
Weight [g/each]	155	186	227	275	292	338

VOLTAGE	110 V~	230 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	4h	3p = 6h 4p/5p = 9h	1h	3p = 9h 4p/5p = 6h	11h	7h


AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	K31S15	K31S25	K31S05			K31S55	10
16	4	K41S15	K41S25		K41S35	K41S45	K41S55	10
16	5		K51S25	K51S05	K51S35		K51S55	10
32	3	K32S15	K32S25	K32S05			K32S55	10
32	4	K42S15	K42S25		K42S35	K42S45	K42S55	10
32	5		K52S25	K52S05	K52S35		K52S55	10



CONNECTOR

splash-proof IP44

- HighPower version
- contacts: brass with lamellar contact CuBe
- with pilot contact
- screw terminals

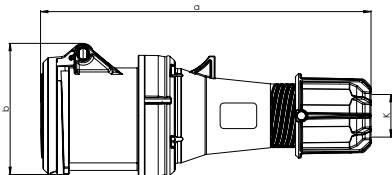

POLES	3	4	5
AMPERE	63		

a	269	269	269
b	107	107	107
K	14,5-36	14,5-36	14,5-36
Weight [g/each]	624	664	720

VOLTAGE	230 V~	400 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	7h

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
63	3	K33S20		K33S50	2
63	4	K43S20	K43S30	K43S50	2
63	5	K53S20	K53S30	K53S50	2