

# CONNECTORS

according to IEC 60309, EN 60309, VDE 0623


turn2fix



## CONNECTOR

splash-proof IP44

- hinged lid with thumb grip
- screw terminals
- quick release locking system (turn2fix)
- brass contacts

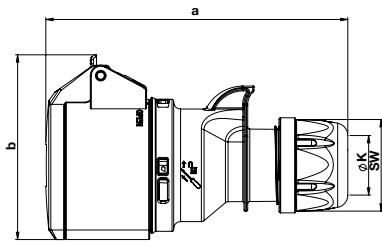

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	133	138	145	161	161	168
b	74	82	89	94	94	99
K	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
SW	42	42	42	50	50	50
Weight [g/each]	134	161	188	228	244	270

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	K31S10	K31S20			K31S50	10
16	4	K41S10	K41S20	K41S30	K41S40	K41S50	10
16	5		K51S20	K51S30		K51S50	10
32	3	K32S10	K32S20			K32S50	10
32	4	K42S10	K42S20	K42S30	K42S40	K42S50	10
32	5		K52S20	K52S30		K52S50	10


plug2power turn2fix



## CONNECTOR

splash-proof IP44

- hinged lid with thumb grip
- screwless connection technology (plug2power)
- quick release locking system (turn2fix)
- nickel-plated contacts

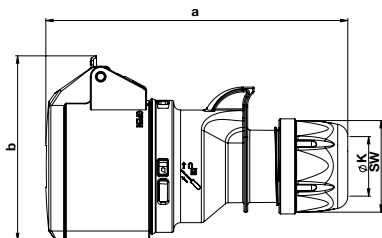

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	133	138	145	161	161	168
b	74	82	89	94	94	99
K	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
SW	42	42	42	50	50	50
Weight [g/each]	136	161	193	228	243	271

VOLTAGE	110 V~	230 V~	400 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	K31SL10	K31SL20		10
16	4	K41SL10	K41SL20	K41SL30	10
16	5		K51SL20	K51SL30	10
32	3	K32SL10	K32SL20		10
32	4	K42SL10	K42SL20	K42SL30	10
32	5		K52SL20	K52SL30	10