

CONNECTORS


according to IEC 60309, EN 60309, VDE 0623



CONNECTOR

watertight IP67

- HighPower version
- with pilot contact
- screw terminals
- contacts: brass with lamellar contact CuBe

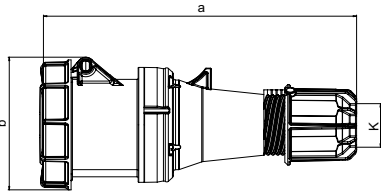

POLES	3	4	5	3	4	5
AMPERE	63			125		

a	269	269	269	287	287	287
b	114	114	114	124	124	124
K	14,5-36	14,5-36	14,5-36	22,5-50	22,5-50	22,5-50
Weight [g/each]	669	710	768	1060	1167	1266

VOLTAGE	230 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	3p = 6h 4p/5p = 9h	1h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
63	3	K33S25				K33S55	2
63	4	K43S25		K43S35	K43S45	K43S55	2
63	5	K53S25	K53S05	K53S35		K53S55	2
125	3	K34S25				K34S55	2
125	4	K44S25		K44S35	K44S45	K44S55	2
125	5	K54S25	K54S05	K54S35		K54S55	2

WALL-MOUNTED SOCKET OUTLETS

according to IEC 60309, EN 60309, VDE 0623


plug⁺power



WALL-MOUNTED SOCKET OUTLET

splash-proof IP44

- screwless connection
- cable entry from above or behind
- including self-sealing grommet
- nickel-plated contacts



POLES	3	4	5	3	4	5
AMPERE	16			32		

a	142	145	144	155	155	157
b	97	98	104	106	106	111
M	25	25	25	25	25	25
Weight [g/each]	228	240	264	274	290	319

b = Height, Angle = 15°

VOLTAGE	110 V~	230 V~	400 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	D31SL10	D31SL20		10
16	4	D41SL10	D41SL20	D41SL30	10
16	5		D51SL20	D51SL30	10
32	3	D32SL10	D32SL20		10
32	4	D42SL10	D42SL20	D42SL30	10
32	5		D52SL20	D52SL30	10