

PLUGS

ACCORDING TO IEC 60309, EN 60309, VDE 0623


turn2fix



PLUG

splash-proof IP44

- screw terminals
- quick release locking system (turn2fix)
- brass contacts

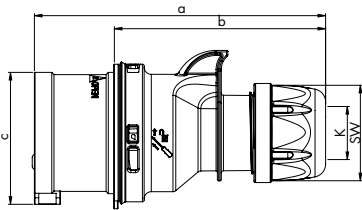

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
SW	42	42	42	50	50	50
Weight [g/each]	109	128	151	181	201	232

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	S31S10	S31S20			S31S50	10
16	4	S41S10	S41S20	S41S30	S41S40	S41S50	10
16	5		S51S20	S51S30		S51S50	10
32	3	S32S10	S32S20			S32S50	10
32	4	S42S10	S42S20	S42S30	S42S40	S42S50	10
32	5		S52S20	S52S30		S52S50	10


plug2power turn2fix



PLUG

splash-proof IP44

- screwless connection technology (plug2power)
- quick release locking system (turn2fix)
- nickel-plated contacts

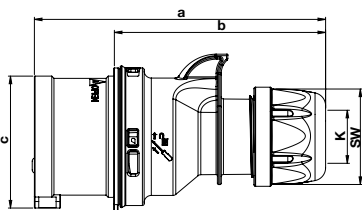

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
SW	42	42	42	50	50	50
Weight [g/each]	111	132	156	186	206	241

VOLTAGE	110 V~	230 V~	400 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	S31SL10	S31SL20		10
16	4	S41SL10	S41SL20	S41SL30	10
16	5		S51SL20	S51SL30	10
32	3	S32SL10	S32SL20		10
32	4	S42SL10	S42SL20	S42SL30	10
32	5		S52SL20	S52SL30	10